

VAMSHI


TREADS

PRODUCT BROCHURE

BIAS ONLY

JET RIB (JR)

BIAS ONLY

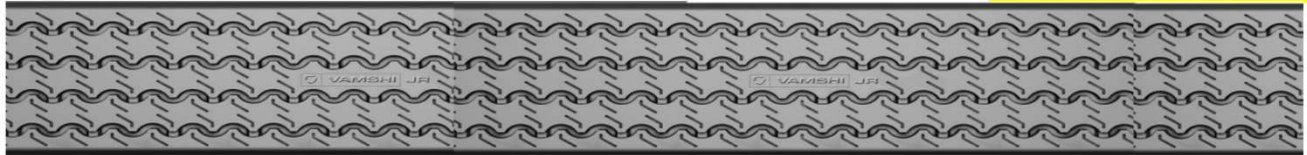

Traction Characteristics:


Good Traction, All Wheel, High Performance

Product Code	Tread width (mm)	Tread Length (Inch)	Tread Length (mm)	Non-Skid Depth (mm)	Weight per Tread	Treads Per Roll (kgs)	Roll Weight (kgs)	For Tyre / Sizes
JR 160-098	160	98	2490	11.30	5.63	5	28.15	7.50-X-16
JR 175-103	175	103	2610	12.60	7.00	4	28.00	8.25-X-20
JR 175-118	175	118	3000	12.60	8.00	4	32.00	8.25-X-20
JR 205-127	205	127	3225	14.50	11.75	3	35.25	10.00-X-20
JR 205-R-127	205	127	3225	12.70	10.55	3	31.65	10.00-X-20
JR 210-127	210	127	3230	14.50	11.85	3	35.55	10.00-X-20
JR 210-R-127	210	127	3225	13.10	11.00	3	33.00	10.00-X-20

* Commercial Tolerance \pm 2% is to be allowed

LUG EXCEL (LEX)

BIAS ONLY

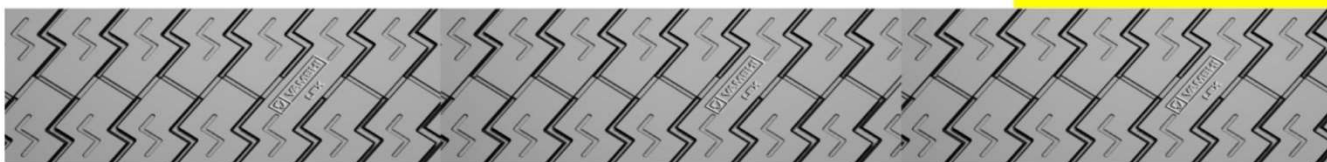


Traction Characteristics: *Rear Axle, Good Traction, Good Performance*

Product Code	Tread width (mm)	Tread Length (Inch)	Tread Length (mm)	Non-Skid Depth (mm)	Weight per Tread	Treads Per Roll (kgs)	Roll Weight (kgs)	For Tyre / Sizes
LEX 150-098	150	98	2490	12.10	5.52	5	27.60	6.00-X-16 7.00-X-15
LEX 160-098	160	98	2490	13.10	6.28	5	31.40	7.50-X-16
LEX 175-103	175	103	2625	13.10	7.25	4	29.00	8.25-X-16
LEX 175-118	175	118	3000	13.10	8.25	4	33.00	8.25-X-20
LEX 205-127	205	127	3225	14.30	11.75	3	35.25	10.00-X-20
LEX 208-127	208	127	3225	14.20	11.05	3	33.15	10.00-X-20
LEX 210-127	210	127	3225	13.70	11.75	3	35.25	10.00-X-20
LEX 210-H-126	210	126	3210	16.20	12.97	2	25.94	10.00-X-20
LEX 210-H-129	210	129	3280	16.20	13.25	2	26.50	10.00-X-20
LEX 210-SH-128	210	128	3250	17.50	14.40	2	28.80	10.00-X-20

* Commercial Tolerance \pm 2% is to be allowed

LUG STAR (LS)

BIAS ONLY

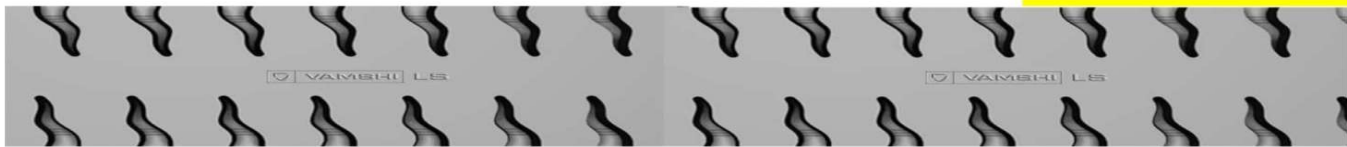


Traction Characteristics: *High Traction, Rear Axle, High Performance*

Product Code	Tread width (mm)	Tread Length (Inch)	Tread Length (mm)	Non-Skid Depth (mm)	Weight per Tread	Treads Per Roll (kgs)	Roll Weight (kgs)	For Tyre / Sizes
LS 210-127	210	127	3225	15.30	12.65	3	37.95	10.00-X-20

*** Commercial Tolerance \pm 2% is to be allowed**

LUG TRAC (LT)

BIAS ONLY

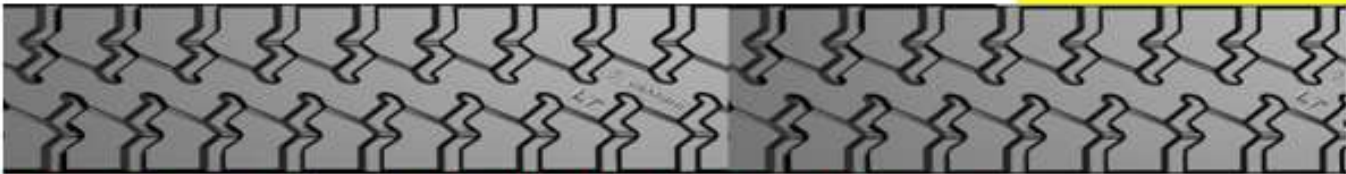


Traction Characteristics: *Free Rolling, All Wheel, High Performance*

Product Code	Tread width (mm)	Tread Length (Inch)	Tread Length (mm)	Non-Skid Depth (mm)	Weight per Tread	Treads Per Roll (kgs)	Roll Weight (kgs)	For Tyre / Sizes
LT 160-098	160	98	2490	13.30	6.23	5	31.15	7.50-X-16
LT 160-M-098	160	98	2490	12.00	5.63	5	28.15	7.50-X-16
LT 170-105	170	105	2670	13.00	7.10	4	28.40	8.25-X-16
LT 170-118	170	118	3000	13.00	7.95	4	31.80	8.25-X-16 8.25-X-20
LT 170-M-103	170	103	2615	12.50	6.60	5	33.00	8.25-X-16
LT 170-M-118	170	118	3000	12.50	7.55	4	30.20	8.25-X-16 8.25-X-20
LT 187-123	187	123	3125	14.70	10.25	3	30.75	9.00-X-20
LT 195-123	195	123	3125	13.80	10.10	3	30.30	9.00-X-20
LT 203-H-127	203	127	3225	14.80	11.55	3	34.65	10.00-X-20
LT 205-L-128	205	128	3250	12.10	9.85	3	29.55	10.00-X-20
LT 205-M-125	205	124	3160	13.50	10.75	3	32.25	10.00-X-20
LT 205-M-127	205	127	3225	13.50	10.95	3	32.85	10.00-X-20
LT 205-R-127	205	127	3225	11.60	9.65	3	28.95	10.00-X-20
LT 210-126	210	126	3195	14.70	11.30	3	33.90	10.00-X-20
LT 210-127	210	127	3225	14.70	11.45	3	34.35	10.00-X-20
LT 215-127	215	127	3225	15.00	12.05	3	36.15	10.00-X-20
LT 215-128	215	128	3250	15.00	12.15	3	36.45	10.00-X-20

* Commercial Tolerance \pm 2% is to be allowed

POWER CUSHION (PC)

BIAS ONLY

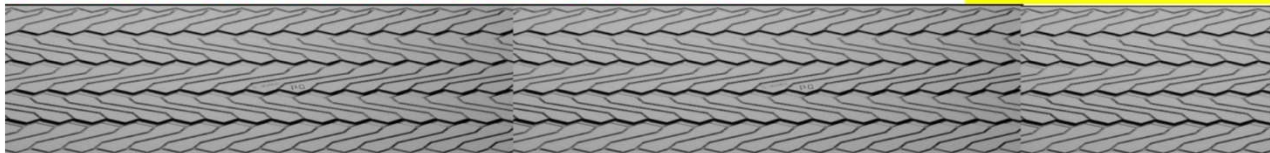


Traction Characteristics: *Free Rolling, High Traction, Anti Skid, High Performance*

Product Code	Tread width (mm)	Tread Length (Inch)	Tread Length (mm)	Non-Skid Depth (mm)	Weight per Tread	Treads Per Roll (kgs)	Roll Weight (kgs)	For Tyre / Sizes
PC 100-065	100	65	1650	10.00	2.17	12	26.04	4.50-X-12 5.65-X-12
PC 110-085	110	85	2160	10.00	3.17	10	31.70	5.90-X-15 145/70-R-15
PC 115-085	115	85	2160	10.00	3.12	10	31.20	5.90-X-15 145/70-R-15

* Commercial Tolerance \pm 2% is to be allowed

VAMSHI PORT SPECIAL (VPS)

BIAS ONLY

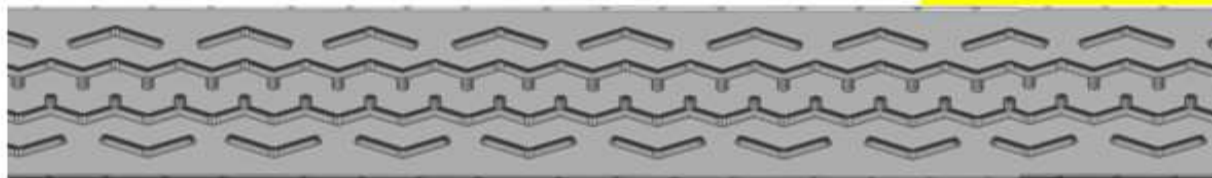

Traction Characteristics: *Free Rolling, All Wheel, High Performance*

Product Code	Tread width (mm)	Tread Length (Inch)	Tread Length (mm)	Non-Skid Depth (mm)	Weight per Tread	Treads Per Roll (kgs)	Roll Weight (kgs)	For Tyre / Sizes
VPS 205-127	205	127	3225	14.00	11.40	3	34.20	10.00-X-20
VPS 205-129	205	129	3265	14.00	11.55	3	34.65	10.00-X-20

* Commercial Tolerance \pm 2% is to be allowed

VAMSHI SUPER MILER (VSM)

BIAS ONLY



Traction Characteristics: *Free Rolling, All Wheel, High Performance*

Product Code	Tread width (mm)	Tread Length (Inch)	Tread Length (mm)	Non-Skid Depth (mm)	Weight per Tread	Treads Per Roll (kgs)	Roll Weight (kgs)	For Tyre / Sizes
VSM 205-127	205	127	3225	12.70	10.25	3	30.75	10.00-X-20
VSM 205-130	205	130	3300	12.70	10.50	3	31.50	10.00-X-20

* Commercial Tolerance $\pm 2\%$ is to be allowed