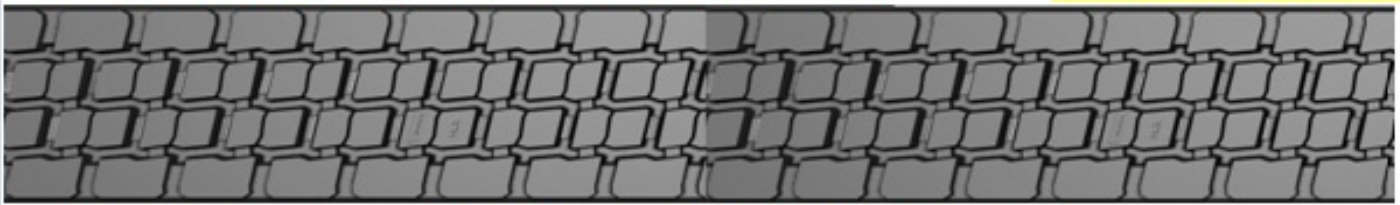


# **VAMSHI**

## **TREADS**

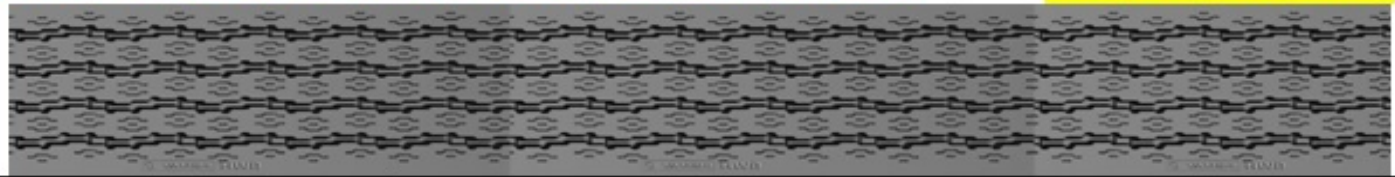
PRODUCT BROCHURE

**RADIAL ONLY**

**HIGHWAY LUG RADIAL (HLR)****RADIAL ONLY****Traction Characteristics:** *Excellent Traction, RearAxle, High Performance*

| Product Code  | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes |
|---------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|------------------|
| HLR 187-120   | 187              | 120                 | 3050              | 14.40               | 9.50             | 3                     | 28.50             | 8.25-R-16        |
| HLR 205-127   | 205              | 127                 | 3225              | 14.00               | 11.25            | 3                     | 33.75             | 9.00-R-20        |
| HLR 210-127   | 210              | 127                 | 3225              | 14.00               | 11.40            | 3                     | 34.20             | 10.00-R-20       |
| HLR 210-128   | 210              | 128                 | 3250              | 14.00               | 11.50            | 3                     | 34.50             | 10.00-R-20       |
| HLR 215-127   | 215              | 127                 | 3225              | 13.90               | 11.55            | 3                     | 34.65             | 10.00-R-20       |
| HLR 215-128   | 215              | 128                 | 3250              | 13.90               | 11.65            | 3                     | 34.95             | 10.00-R-20       |
| HLR 220-128   | 220              | 128                 | 3240              | 13.80               | 11.85            | 3                     | 35.55             | 10.00-R-20       |
| HLR 220-130   | 220              | 130                 | 3300              | 13.80               | 12.10            | 3                     | 36.30             | 10.00-R-20       |
| HLR 220-H-126 | 220              | 126                 | 3200              | 18.10               | 14.85            | 2                     | 29.70             | 10.00-R-20       |
| HLR 220-H-130 | 220              | 130                 | 3300              | 18.10               | 15.30            | 2                     | 30.60             | 10.00-R-20       |
| HLR 220-R-128 | 220              | 128                 | 3250              | 13.20               | 11.30            | 3                     | 33.90             | 10.00-R-20       |

\* Commercial Tolerance  $\pm 2\%$  is to be allowed

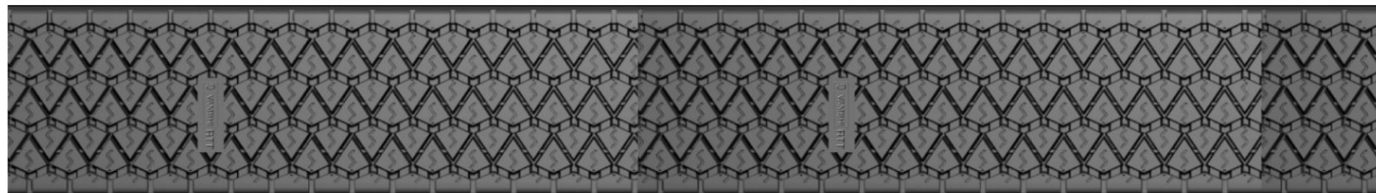
**HIGHWAY RADIAL (HWR)****RADIAL ONLY**

| Traction Characteristics: |                  | <i>Free Rolling, All Wheel, Excellent Performance</i> |                   |                     |                  |                       |                   |  |
|---------------------------|------------------|---|-------------------|---------------------|------------------|-----------------------|-------------------|--|
| Product Code              | Tread width (mm) | Tread Length (Inch)                                   | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes   |
| HWR 200-096               | 200              | 96  | 2450              | 10.50               | 6.52             | 5                     | 32.60             | 235/75-R-17.5  |
| HWR 205-096               | 205              | 96  | 2450              | 12.60               | 7.50             | 4                     | 30.00             | 235/75-R-17.5  |
| HWR 205-099               | 205              | 99  | 2525              | 12.60               | 7.70             | 4                     | 30.80             | 235/75-R-17.5  |
| HWR 205-128               | 205              | 128   | 3250              | 12.60               | 9.90             | 3                     | 29.70             | 9.00-R-20<br>10.00-R-20                                  |
| HWR 210-127               | 210              | 127   | 3225              | 13.90               | 11.25            | 3                     | 33.75             | 10.00-R-20   |
| HWR 210-130               | 210              | 130   | 3300              | 13.90               | 11.50            | 3                     | 34.50             | 10.00-R-20<br>11.00-R-20                                 |
| HWR 215-127               | 215              | 127   | 3225              | 13.70               | 11.65            | 3                     | 34.95             | 10.00-R-20   |
| HWR 215-128               | 215              | 128   | 3250              | 13.70               | 11.75            | 3                     | 35.25             | 10.00-R-20   |
| HWR 215-130               | 215              | 130   | 3300              | 13.70               | 11.92            | 3                     | 35.76             | 10.00-R-20<br>11.00-R-20                                 |
| HWR 220-127               | 220              | 127   | 3225              | 13.25               | 11.44            | 3                     | 34.32             | 10.00-R-20   |
| HWR 220-130               | 220              | 130   | 3300              | 13.25               | 11.70            | 3                     | 35.10             | 10.00-R-20<br>11.00-R-20                                 |
| HWR 220-134               | 220              | 134   | 3400              | 13.25               | 12.05            | 3                     | 36.15             | 10.00-R-20<br>11.00-R-20                                 |
| HWR 220-H-127             | 220              | 127   | 3225              | 14.50               | 12.15            | 3                     | 36.45             | 10.00-R-20   |
| HWR 220-H-129             | 220              | 129   | 3275              | 14.50               | 12.35            | 3                     | 37.05             | 10.00-R-20<br>11.00-R-20                                 |
| HWR 225-127               | 225              | 127   | 3225              | 14.30               | 12.35            | 3                     | 37.05             | 10.00-R-20   |
| HWR 230-128               | 230              | 128   | 3240              | 13.00               | 12.10            | 3                     | 36.30             | 10.00-R-20   |
| HWR 230-130               | 230              | 130   | 3300              | 13.00               | 12.35            | 3                     | 37.05             | 10.00-R-20<br>11.00-R-20                                 |
| HWR 230-134               | 230              | 134   | 3400              | 13.00               | 12.70            | 3                     | 38.10             | 10.00-R-20<br>11.00-R-20                                 |
| HWR 240-127               | 240              | 127   | 3225              | 12.80               | 12.25            | 3                     | 36.75             | 11-R-22.5<br>295/80-R-22.5                               |
| HWR 240-130               | 240              | 130   | 3300              | 12.80               | 12.50            | 3                     | 37.50             | 11-R-22.5<br>295/80-R-22.5                               |
| HWR 240-134               | 240              | 134   | 3400              | 12.80               | 12.85            | 3                     | 38.55             | 11-R-22.5<br>295/80-R-22.5                               |
| HWR 240-R-130             | 238              | 130   | 3300              | 9.80                | 10.00            | 3                     | 30.00             | 10.00-R-20<br>11.00-R-20<br>12.00-R-20<br>295/850-R-22.5 |
| HWR 250-126               | 250              | 126   | 3200              | 14.00               | 13.60            | 2                     | 27.20             | 295/80-R-22.5  |
| HWR 250-130               | 250              | 130   | 3300              | 14.00               | 14.03            | 2                     | 28.06             | 295/80-R-22.5  |
| HWR 250-134               | 250              | 134   | 3400              | 14.00               | 14.45            | 2                     | 28.90             | 295/80-R-22.5  |

\* Commercial Tolerance  $\pm$  2% is to be allowed

# RADIAL TEMPO TRAVELLER (RTT)

**RADIAL ONLY**



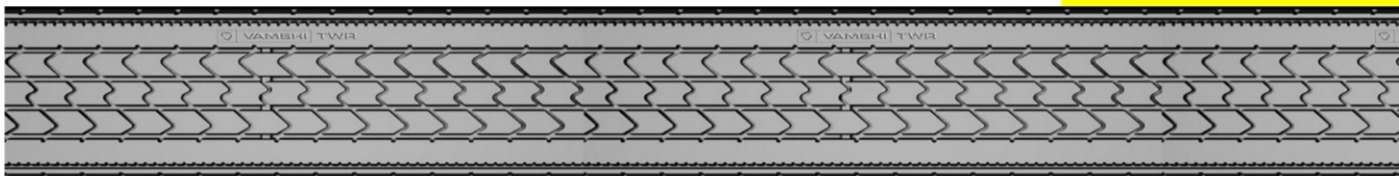
**Traction Characteristics:** *Free Rolling, All Wheel, High Performance, Light Truck*

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|------------------|
| RTT 174-087  | 174              | 87                  | 2210              | 11.30               | 5.05             | 6                     | 30.30             | 215/75-R-15      |

**\* Commercial Tolerance  $\pm$  2% is to be allowed**

# TRIALWAY RADIAL (TWR)

**RADIAL ONLY**



**Traction Characteristics:** *Free Rolling, All Wheel, High Speed, High Performance*

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| TWR 219-127  | 219              | 127                 | 3215              | 10.50               | 9.80             | 3                     | 29.40             | 10.00-R-20               |
| TWR 219-130  | 219              | 130                 | 3300              | 10.50               | 10.05            | 3                     | 30.15             | 10.00-R-20<br>11.00-R-20 |

**\* Commercial Tolerance  $\pm$  2% is to be allowed**

# ULTRA GRIP RADIAL (UGR)

RADIAL ONLY



Traction Characteristics: *Rear Axle, Good Traction, High Performance*

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| UGR 210-130  | 210              | 130                 | 3300              | 14.60               | 11.20            | 3                     | 33.60             | 10.00-R-20               |
| UGR 219-130  | 219              | 130                 | 3300              | 13.50               | 11.15            | 3                     | 33.45             | 10.00-R-20<br>11.00-R-20 |

\* Commercial Tolerance  $\pm$  2% is to be allowed

# VAMSHI DIRECTIONAL RADIAL(VDR)

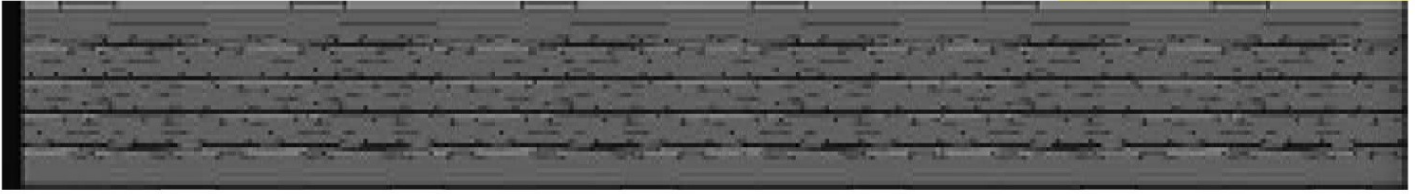
RADIAL ONLY



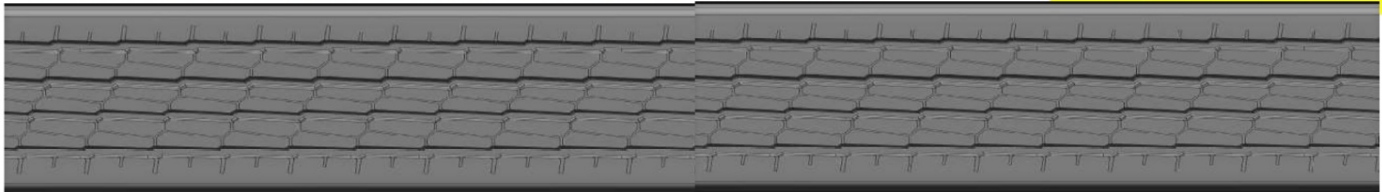
Traction Characteristics: *Rear Axle, Good Traction, High Performance, Mixed Service*

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| VDR 220-130  | 220              | 130                 | 3300              | 15.00               | 12.65            | 3                     | 37.95             | 10.00-R-20<br>11.00-R-20 |
| VDR 230-130  | 230              | 130                 | 3300              | 15.00               | 13.30            | 2                     | 26.60             | 10.00-R-20<br>11.00-R-20 |

\* Commercial Tolerance  $\pm$  2% is to be allowed

**VAMSHI HIGH SPEED RADIAL(VHSR)****RADIAL ONLY**Traction Characteristics: *Free Rolling, All Wheel, Excellent Performance*

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|------------------|
| VHSR 215-128 | 215              | 128                 | 3240              | 11.50               | 10.20            | 3                     | 30.60             | 10.00-R-20       |

\* Commercial Tolerance  $\pm$  2% is to be allowed**VAMSHI RADIAL ALL WHEEL(VRAW)****RADIAL ONLY**Traction Characteristics: *Free Rolling, All Wheel, High Performance*

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| VRAW 215-128 | 215              | 128                 | 3250              | 13.10               | 10.95            | 3                     | 32.85             | 10.00-R-20               |
| VRAW 220-128 | 220              | 128                 | 3250              | 13.60               | 11.45            | 3                     | 34.35             | 10.00-R-20<br>11.00-R-20 |

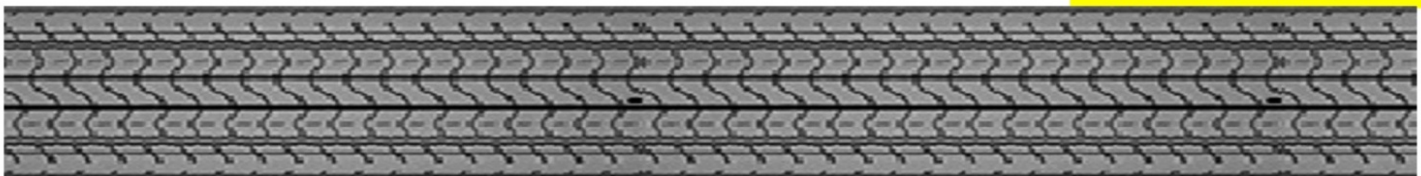
\* Commercial Tolerance  $\pm$  2% is to be allowed

**VAMSHI RADIAL CHALLENGE (VRC)****RADIAL ONLY**

**Traction Characteristics:** *Free Rolling, All Wheel, Good Traction, High Performance*

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|------------------|
| VRC 215-128  | 215              | 128                 | 3250              | 12.7                | 10.7             | 3                     | 32.10             | 10.00-R-20       |
| VRC 215-131  | 215              | 131                 | 3330              | 12.7                | 10.95            | 3                     | 32.85             | 10.00-R-20       |
| VRC 220-128  | 220              | 128                 | 3260              | 12.50               | 10.95            | 3                     | 32.85             | 10.00-R-20       |

**\* Commercial Tolerance  $\pm$  2% is to be allowed**

**VAMSHI RADIAL HIGHWAY (VRH)****RADIAL ONLY**

**Traction Characteristics:** *Free Rolling, All Wheel, High Performance*

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| VRH 220-129  | 220              | 129                 | 3275              | 13.10               | 11.65            | 3                     | 34.95             | 10.00-R-20<br>11.00-R-20 |

**\* Commercial Tolerance  $\pm$  2% is to be allowed**

**VAMSHI RADIAL EXCEL (VRE)****RADIAL ONLY****Traction Characteristics: Free Rolling, All Wheel, Excellent Performance**

| Product Code | Tread width (mm) | Tread Length (mm) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (mm) | Roll Weight (kgs) | For Tyre / Sizes              |
|--------------|------------------|-------------------|-------------------|---------------------|------------------|----------------------|-------------------|-------------------------------|
| VRE 200-096  | 200              | 96                | 2450              | 14.00               | 8.30             | 4                    | 33.20             | 235/75-R-17.5                 |
| VRE 205-127  | 205              | 127               | 3235              | 13.50               | 11.05            | 3                    | 33.15             | 9.00-R-20                     |
| VRE 210-127  | 210              | 127               | 3235              | 14.00               | 11.63            | 3                    | 34.89             | 9.00-R-20<br>10.00-R-20       |
| VRE 215-127  | 215              | 127               | 3235              | 14.15               | 11.75            | 3                    | 35.25             | 10.00-R-20                    |
| VRE 215-130  | 215              | 130               | 3300              | 14.15               | 11.98            | 3                    | 35.94             | 10.00-R-20<br>11.00-R-20      |
| VRE 225-127  | 225              | 127               | 3235              | 13.65               | 12.50            | 3                    | 37.50             | 10.00-R-20<br>11.00-R-20      |
| VRE 225-130  | 225              | 130               | 3300              | 13.65               | 12.75            | 3                    | 38.25             | 10.00-R-20<br>11.00-R-20      |
| VRE 240-129  | 240              | 129               | 3280              | 16.00               | 14.25            | 2                    | 28.50             | 11.00-R-22.5<br>295/80-R-22.5 |
| VRE 245-130  | 245              | 130               | 3300              | 14.00               | 13.80            | 2                    | 27.60             | 295/80-R-22.5                 |

\* Commercial Tolerance  $\pm 2\%$  is to be allowed

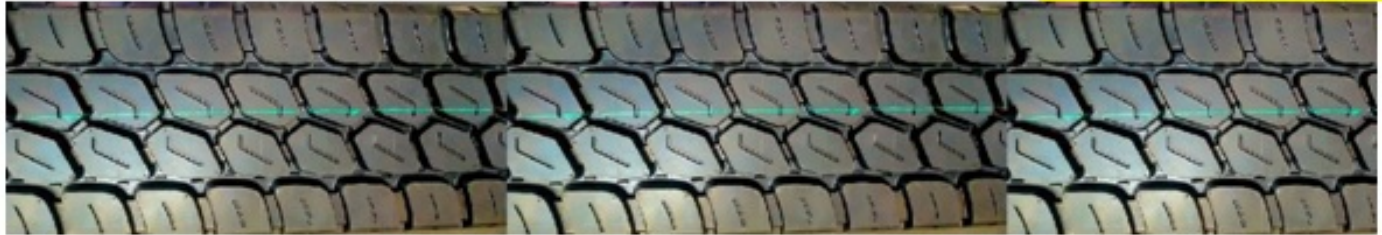


**VAMSHI RADIAL LONG DRIVE (VRLD)****RADIAL ONLY**

**Traction Characteristics:** *Rear Wheel, Good Traction, High Performance*

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| VRLD 175-118 | 175              | 118                 | 3000              | 12.00               | 7.60             | 4                     | 30.40             | 8.25-R-16<br>8.25-R-20   |
| VRLD 210-128 | 210              | 128                 | 3245              | 13.30               | 10.90            | 3                     | 32.70             | 10.00-R-20               |
| VRLD 215-128 | 215              | 128                 | 3245              | 14.00               | 11.40            | 3                     | 34.20             | 10.00-R-20               |
| VRLD 215-130 | 215              | 130                 | 3300              | 14.00               | 11.59            | 3                     | 34.77             | 10.00-R-20               |
| VRLD 220-128 | 220              | 128                 | 3250              | 14.00               | 11.75            | 3                     | 35.25             | 10.00-R-20               |
| VRLD 220-130 | 220              | 130                 | 3300              | 14.00               | 11.90            | 3                     | 35.70             | 10.00-R-20               |
| VRLD 230-127 | 230              | 127                 | 3225              | 14.00               | 12.10            | 3                     | 36.30             | 10.00-R-20               |
| VRLD 230-129 | 230              | 129                 | 3285              | 14.00               | 12.35            | 3                     | 37.05             | 10.00-R-20               |
| VRLD 230-133 | 230              | 133                 | 3390              | 14.00               | 12.75            | 3                     | 38.25             | 11.00-R-20               |
| VRLD 240-132 | 240              | 132                 | 3340              | 13.00               | 12.40            | 3                     | 37.20             | 10.00-R-20<br>11.00-R-20 |
| VRLD 240-134 | 240              | 134                 | 3400              | 13.00               | 12.62            | 3                     | 37.86             | 10.00-R-20<br>11.00-R-20 |

**\* Commercial Tolerance  $\pm$  2% is to be allowed**

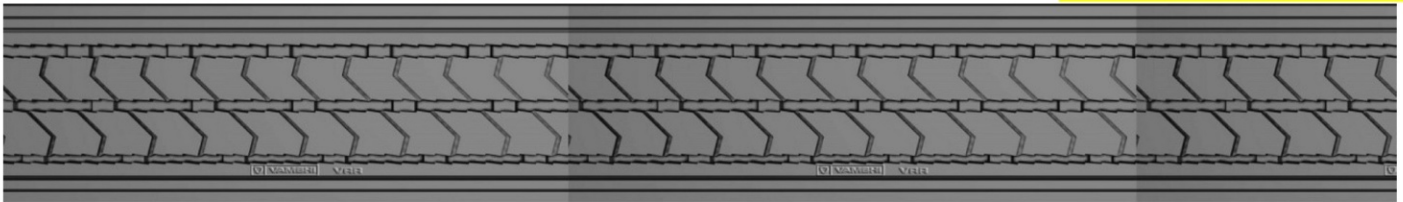
**VAMSHI RADIAL PRIDE (VRP)****RADIAL ONLY****Traction Characteristics: Free Rolling, Rear Wheel, Good Traction, High Performance**

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| VRP 215-128  | 215              | 128                 | 3260              | 14.50               | 11.35            | 3                     | 34.05             | 10.00-R-20               |
| VRP 220-128  | 220              | 128                 | 3260              | 14.50               | 11.60            | 3                     | 34.80             | 10.00-R-20<br>11.00-R-20 |
| VRP 220-131  | 220              | 131                 | 3325              | 14.50               | 11.83            | 3                     | 35.49             | 10.00-R-20<br>11.00-R-20 |

**\* Commercial Tolerance  $\pm$  2% is to be allowed**

# VAMSHI RADIAL RIB (VRR)

**RADIAL ONLY**



**Traction Characteristics:** *Free Rolling, All Wheel, Excellent Performance*

| Product Code  | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|---------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| VRR 210-127   | 210              | 127                 | 3225              | 13.50               | 11.40            | 3                     | 34.20             | 10.00-R-20               |
| VRR 210-130   | 210              | 130                 | 3300              | 13.50               | 11.65            | 3                     | 34.95             | 10.00-R-20<br>11.00-R-20 |
| VRR 220-127   | 220              | 127                 | 3225              | 14.10               | 12.45            | 3                     | 37.35             | 10.00-R-20               |
| VRR 220-128   | 220              | 128                 | 3250              | 14.10               | 12.55            | 3                     | 37.65             | 10.00-R-20               |
| VRR 220-130   | 220              | 130                 | 3300              | 14.10               | 12.75            | 3                     | 38.25             | 10.00-R-20<br>11.00-R-20 |
| VRR 220-H-130 | 220              | 130                 | 3300              | 18.00               | 15.00            | 2                     | 30.00             | 10.00-R-20<br>11.00-R-20 |
| VRR 220-R-127 | 220              | 127                 | 3225              | 13.00               | 11.35            | 3                     | 34.05             | 10.00-R-20               |
| VRR 220-R-128 | 220              | 128                 | 3250              | 13.00               | 11.45            | 3                     | 34.35             | 10.00-R-20               |
| VRR 220-R-130 | 220              | 130                 | 3300              | 13.00               | 11.60            | 3                     | 34.80             | 10.00-R-20<br>11.00-R-20 |
| VRR 230-130   | 230              | 130                 | 3300              | 14.10               | 13.30            | 2                     | 26.60             | 10.00-R-20<br>11.00-R-20 |
| VRR 230-H-130 | 230              | 130                 | 3300              | 18.00               | 15.70            | 2                     | 31.40             | 10.00-R-20<br>11.00-R-20 |

**\* Commercial Tolerance  $\pm$  2% is to be allowed**

**VAMSHI RADIAL SUPREME (VRS)****RADIAL ONLY****Traction Characteristics: *Free Rolling, All Wheel, High Performance***

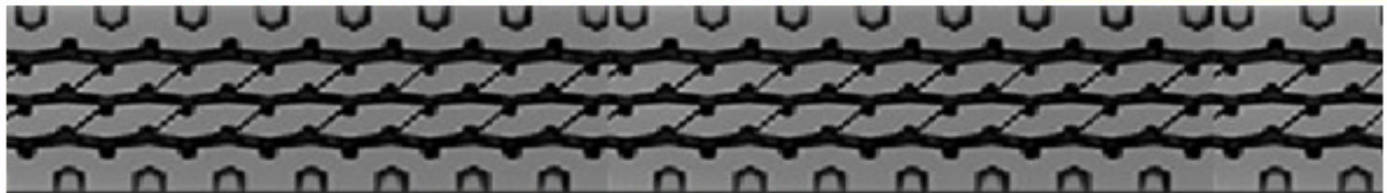
| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes        |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|-------------------------|
| VRS 205-127  | 205              | 127                 | 3235              | 14.00               | 11.35            | 3                     | 34.05             | 9.00-R-20<br>10.00-R-20 |
| VRS 210-127  | 210              | 127                 | 3235              | 14.00               | 11.70            | 3                     | 35.10             | 10.00-R-20              |

**\* Commercial Tolerance  $\pm$  2% is to be allowed**

**VAMSHI RADIAL SUPER DRIVE (VRSD)****RADIAL ONLY****Traction Characteristics: *Excellent Traction, RearAxle, High Performance***

| Product Code   | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|----------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| VRSD 215-128   | 215              | 128                 | 3245              | 13.70               | 11.35            | 3                     | 34.05             | 10.00-R-20<br>11.00-R-20 |
| VRSD 220-128   | 220              | 128                 | 3250              | 14.00               | 11.95            | 3                     | 35.85             | 10.00-R-20<br>11.00-R-20 |
| VRSD 220-R-128 | 220              | 128                 | 3250              | 13.20               | 11.45            | 3                     | 34.35             | 10.00-R-20<br>11.00-R-20 |

**\* Commercial Tolerance  $\pm$  2% is to be allowed**

**VAMSHI RADIAL XPRESS (VRX)****RADIAL ONLY****Traction Characteristics: Free Rolling, All Wheel, High Performance**

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| VRX 205-127  | 205              | 127                 | 3225              | 13.20               | 9.90             | 3                     | 29.70             | 9.00-R-20<br>10.00-R-20  |
| VRX 215-128  | 215              | 128                 | 3250              | 13.10               | 11.05            | 3                     | 33.15             | 10.00-R-20               |
| VRX 220-127  | 220              | 127                 | 3225              | 13.80               | 11.10            | 3                     | 33.30             | 10.00-R-20<br>11.00-R-20 |
| VRX 220-128  | 220              | 128                 | 3250              | 13.80               | 11.20            | 3                     | 33.60             | 10.00-R-20<br>11.00-R-20 |

\* Commercial Tolerance  $\pm 2\%$  is to be allowed

**VAMSHI SUPER HAULTRAILER (VSHT)****RADIAL ONLY****Traction Characteristics: *Rear Axle, Good Traction, Good Performance***

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| VSHT 220-130 | 220              | 130                 | 3300              | 16.00               | 13.05            | 3                     | 39.15             | 10.00-R-20<br>11.00-R-20 |

**\* Commercial Tolerance  $\pm 2\%$  is to be allowed**

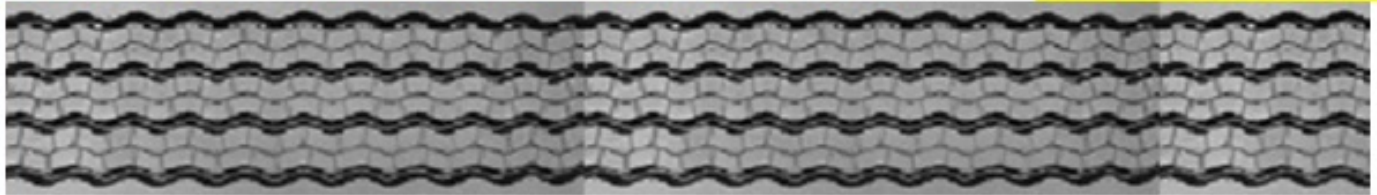


**Traction Characteristics: Free Rolling, All Wheel, High Performance**

| Product Code  | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|---------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| VSR 210-127   | 210              | 127                 | 3225              | 13.60               | 11.05            | 3                     | 33.15             | 10.00-R-20               |
| VSR 215-127   | 215              | 127                 | 3225              | 13.50               | 11.55            | 3                     | 34.65             | 10.00-R-20               |
| VSR 215-128   | 215              | 128                 | 3250              | 13.50               | 11.65            | 3                     | 34.95             | 10.00-R-20               |
| VSR 215-130   | 215              | 130                 | 3300              | 13.50               | 11.80            | 3                     | 35.40             | 10.00-R-20<br>11.00-R-20 |
| VSR 220-128   | 220              | 128                 | 3240              | 14.00               | 12.50            | 3                     | 37.50             | 10.00-R-20               |
| VSR 220-130   | 220              | 130                 | 3300              | 14.00               | 12.75            | 3                     | 38.25             | 10.00-R-20<br>11.00-R-20 |
| VSR 220-H-129 | 220              | 129                 | 3270              | 18.00               | 14.70            | 2                     | 29.40             | 10.00-R-20<br>11.00-R-20 |
| VSR 220-R-127 | 220              | 127                 | 3225              | 13.30               | 11.35            | 3                     | 34.05             | 10.00-R-20<br>11.00-R-20 |
| VSR 220-R-128 | 220              | 128                 | 3250              | 13.30               | 11.45            | 3                     | 34.35             | 10.00-R-20<br>11.00-R-20 |
| VSR 220-R-130 | 220              | 130                 | 3300              | 13.30               | 11.60            | 3                     | 34.80             | 10.00-R-20<br>11.00-R-20 |
| VSR 220-R-132 | 220              | 132                 | 3365              | 13.30               | 11.86            | 3                     | 35.58             | 11.00-R-20               |
| VSR 230-129   | 230              | 129                 | 3270              | 14.60               | 13.35            | 2                     | 26.70             | 10.00-R-20<br>11.00-R-20 |
| VSR 230-H-129 | 230              | 129                 | 3270              | 18.10               | 15.40            | 2                     | 30.80             | 10.00-R-20<br>11.00-R-20 |
| VSR 230-R-128 | 230              | 128                 | 3240              | 12.80               | 11.75            | 3                     | 35.25             | 10.00-R-20               |
| VSR 230-R-130 | 230              | 130                 | 3300              | 12.80               | 12.00            | 3                     | 36.00             | 10.00-R-20<br>11.00-R-20 |

**\* Commercial Tolerance  $\pm$  2% is to be allowed**



**VAMSHI TRAILER PLUS (VTP)****RADIAL ONLY****Traction Characteristics: *Free Rolling, All Wheel, High Performance***

| Product Code | Tread width (mm) | Tread Length (Inch) | Tread Length (mm) | Non-Skid Depth (mm) | Weight per Tread | Treads Per Roll (kgs) | Roll Weight (kgs) | For Tyre / Sizes         |
|--------------|------------------|---------------------|-------------------|---------------------|------------------|-----------------------|-------------------|--------------------------|
| VTP 220-127  | 220              | 127                 | 3225              | 14.70               | 12.70            | 3                     | 38.10             | 10.00-R-20               |
| VTP 220-130  | 220              | 130                 | 3300              | 14.70               | 13.00            | 3                     | 39.00             | 10.00-R-20<br>11.00-R-20 |

**\* Commercial Tolerance  $\pm$  2% is to be allowed**